	of materials, labour, HOM complete as per specifications.Wall & bottom thickness 15cm complete as per the direction of Engineer in charge					
5	*Providing T.M.T. steel reinforcement for R.C.C. work including straightening, cutting, bending, hooking, placing in position, lapping and/or welding wherever required, tying with binding wire and anchoring to the adjoining members wherever necessary complete as per disign (laps, hooks and wastage shall not be measured and paid) cost of materials, labour, HOM complete as per specification. MORTH Specification No.1600 & 2200 TMT Bars Fe 500 complete as per the direction of Engineer in charge*	*ton*	*40.23*			
6	*Providing and constructing granite / trap / basalt size stone masonry in foundation with cement mortar, stone hammered dressed in courses not less than 20 cms high, bond stones at 2m. apart in each course including cost of materials, labour, curing complete as per specifications. - do - cement mortar 1:6 complete as per the direction of Engineer in charge*	*Cum*	*82.80*			
7	*Providing and constructing precast concrete solid blocks with compressive strength not less than 3.5 Newton per sqm with cement mortar 1:4 masonry (quoin, Jamb, closer blocks) with solid concrete blocks of size 40x15x20cms conforming to I.S: 2185/1965 in superstructure including cost of materials, labour charges, scaffolding, curing complete as per*	*Sqm*	*6557.60*			

Scanned with CamScanner

	specifications.-do with solid concrete blocks of size 400*200*200 mm complete as per the direction of Engineer in charge					
8	Providing ruled pointing to coursed stone masonry with cement mortar, 20mm deep, after raking joints to depth of 20mm nicely lining, including cost of materials, labour, HOM curing complete as per specifications.– do – cement mortar 1:3complete as per the direction of Engineer in charge	Cum	22433.60			
9	Providing and laying in position plain cement concrete of Mix 1:2:4 with OPC @ 240kgs, with 20mm and down size graded granite metal coarse aggregates @ 0.69 cum and fine aggregtes @ 0.459 cum, machine mixed, concrete laid in layers not exceeding 15 cms. thick, well compacted, in For Coping , including cost of all materials, labour, HOM curing complete as per the direction of Engineer in charge	Cum	516.90			
10	Providing and laying in position plain cement concrete of Mix 1:2:4 with OPC @ 240kgs, with 20mm and down size graded granite metal coarse aggregates @ 0.878 cum and fine aggregtes @ 0.53cum, machine mixed, concrete laid in layers not exceeding 15 cms. thick, well compacted, in foundation, plinth and cills, including cost of all materials, labour, HOM curing complete as per the direction of Engineer in charge	Cum	341.61			
11	Providing & laying precast drain cover slab of 100 mm thickness in CM 1:3 including cost of all materials, labour, curing, transportation, loading, unloading etc, complete as per	Sqm	5053.31			

Scanned with CamScanner

	the directions of the Engineer In Charge.(0.9 x 0.60 x 0.1)					
12	Providing and Fixing RCC Precast Cover Slab of 250 mm Thick for Drains in Cement Concrete M-20 using graded granite Jelly of 20 mm and down size with steel Reinforcement, including form work lift charges, curing and concrete finished surface on both sides etc., complete as per the direction of Engineer in charge	Sqm	157.00			
13	Removing and resetting of kerb stones.complete as per the direction of Engineer in charge	Rmt	10058.25			
14	Providing and fixing pre cast solid concrete kerb stones of size 450x150x500 mm made out of CC 1:2:4 and finished with CM 1:3 plastering and finishing cutting ete., complete as per the direction of Engineer in charge	no's	11900			
15	Painting two coats after filling the surface with synthetic enamel paint in approved shades on new plastered concrete surfaces, with materials, labour complete as per the direction of Engineer in charge	Sqm	6165.20			
16	Construction of embankment with approved material Gravel/Murrum with all lifts and leads, transporting to site, spreading, grading to required slope and compacting to meet requirement Table 300-2 complete as per specifications, including cost of gravel / murrum, watering charges & compaction by vibratory roller to 95% of modified proctors	Cum	661.20			

Scanned with CamScanner

	density. complete as per the direction of Engineer in charge					
17	Providing and laying heavy duty cobble stones 75mm thick interlock pavers, using cement and course sand for manufacture of blocks of approved size, shape and colour with a minimum compressive strength of 281 kg per sqm over 50mm thick sand bed (average thickness) and compacting with plate vibrator having 3 tons compaction force thereby forcing part of sand underneath to come up in between joints, final compaction of paver surface joints into its final level, including cost of materials, labour and HOM of machineries complete as per the direction of Engineer in charge	Sqm	2088.00			
18	Excavation for roadwork in soil with hydraulic excavator of 0.90 cum bucket capacity including cutting and loading in tippers, trimming bottom and side slopes, in accordance with requirements of lines, grades and cross sections, and transporting to embankment location and complete as per the direction of Engineer in charge	Cum	3559.55			
19	Construction of granular sub-base Grading-V as Sub-base and drainage layer by providing coarse graded crushed stone aggregates of granite/ trap/basalt material, mixing in a mechanical mix plant at OMC, Carriage of mixed material to work site, spreading in uniform layers with motor grader on prepared surface and compacting with vibratory power roller to achieve the 98 % proctor density, complete as per the direction of Engineer in charge	Cum	2467			

Scanned with CamScanner

20	*Providing, laying, spreading and compacting crushed stone aggregates of granite / trap / basalt to wet mix macadam specifications including pre mixing the material with water at OMC in mechanical mix plant carriage of mixed method of tipper to site, laying in uniform layers with paver in sub-base/base course on well prepared surface and compacting with vibratory roller to achieve the desired density complete as per the direction of Engineer in charge*	*Cum*	*2728.99*			
21	*Providing and applying primer coat with S.S. bitumen emulsion on prepared surface of granular base such as WMM ,including clearing of road surface and spraying primer at the rate of 0.60 kg / sqm using mechanical means complete as per Specifications. MORTH Specification No. 502 complete as per the direction of Engineer in charge*	*Sqm*	*11865.18*			
22	*Cleaning the existing black topped surface with brooms, soft brushes and finally dusting with old gunny bags and / or compressed air to receive bituminous treatment including cost of all materials, labour, HOM complete as per the direction of Engineer in charge*	*Sqm*	*33955.92*			
23	*Providing and applying tack coat using 80/100 grade bitumen(VG10) on the prepared black topped surfaces at 2.5 kg per 10 sqm, heating bitumen in boiler fitted with spray set (excluding cleaning of road surface) including cost of all materials, labour, HOM of machineries complete as per the direction of Engineer in charge*	*Sqm*	*89413.51*			

Scanned with CamScanner

24	Providing and laying dense graded bituminous macadam using crushed aggregates of specified grading, premixed with VG30 grade bituminous binder and, transporting the hot mix to work site, laying to the required grade, level and alignment, rolling with smooth wheeled, vibratory and tandem rollers to achieve the desired compaction as per MORTH table 500-10 complete in all respects complete as per specifications. Clause 505 of morth V revision using 40/60 TPH capacity H.M.P. with mechanical paver Gr-II (50mm to 75mm) with 4.5% VG-30 Bitumen. complete as per the direction of Engineer in charge	Cum	2345.06				
25	Providing and laying bituminous concrete using crushed aggregates of specified grading, premixed with bituminous binder and filler, transporting the hot mix to work site, laying with a paver finisher to the required grade, level and alignment, rolling with smooth wheeled, vibratory and tandem rollers to achieve the desired compaction in all respects complete as per specifications. Clause 507 of MORTH V revision. -using40/60 TPH capacity H.M.P. with Mechanical Paver Gr-II (30 mm to 40 mm) with 5.4% VG-30 Bitumen complete as per the direction of Engineer in charge	Cum	1876.04				
26	Road Marking with Hot Applied Thermoplastic Compound with Reflectrising Glass Beads on Bituminous Surface:- Providing and laying of hot applied thermoplastic compound 2.5 mm thick including reflectorising glass beads at 250 gms per sqm area, thickness of 2.5 mm is exclusive of surface applied glass	Sqm	2716.25				

Scanned with CamScanner

	beads as per IRC:35. The finished surface to be level, uniform and free from streaks and holes complete as per the direction of Engineer in charge			
27	*Providing and fixing of road stud 100x 100 mm, diecast in aluminium, resistant to corrosive effect of salt and grit, fitted with lense reflectors, installed in concrete or asphaltic surface by drilling hole 30 mm upto a depth of 60 mm and bedded in a suitable bituminous grout or epoxy mortar, all as per BS: 873 part 4:1973 complete as per the direction of Engineer in charge*	*no's*	*3142.00*	

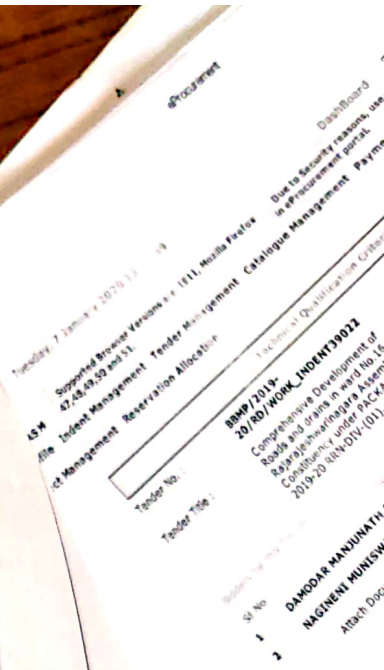

Scanned with CamScanner